




**Full, empty and demand indicator**  
for any mounting position  
with circulating measuring blade, absolutely tight  
due to folding bellows!

**Signal contact** 2 A / 250V AC potential-free  
**Type of protection** IP66 in accordance with DIN EN 60529  
**Maintenance** none

3


**A3 or A4**  
**Round housing**  
Order code  
**DF31AnCnG3EXM**

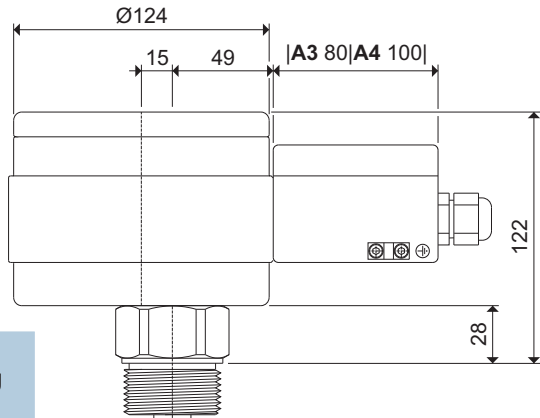

Measuring blade XM

001-0139

**A1 or A2**  
**Compact housing**  
Order code  
**DF31AnCnG3E**

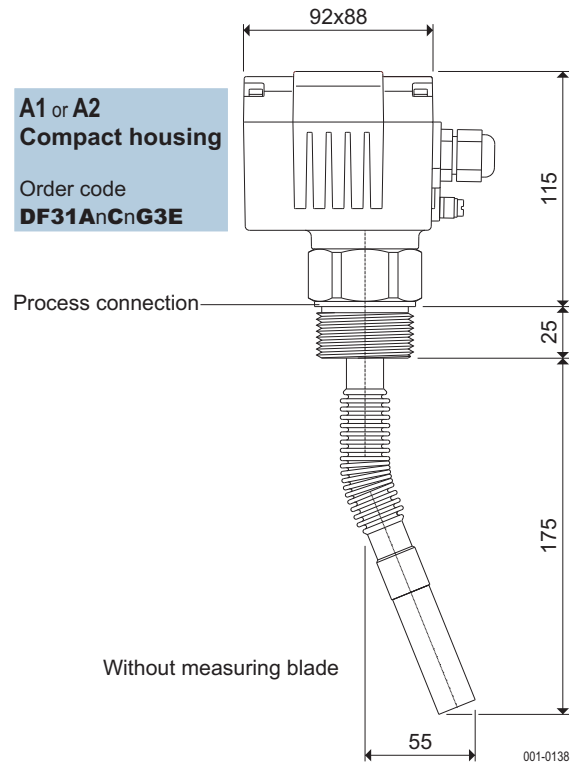

70°C

Heat protection shield

**E1, E2 or E3**  
**Temperature decoupling bell housing**  
(Extension for control head protection against overheating.)

**E1 = 290** V  
**E2 = 290** L  
**E3 = 360** A

**E1** up to 150°C  
**E2** up to 200°C  
**E3** up to 260°C

You will find further technical details under appliance information DF-GI-..

001-0140