

2 housing versions to choice

**Choice of options with surcharges** €

**Certifications, certificates, approvals**  
**B0** Standard = € conform and IP66 ..... 0,--

**Supply voltage / Supply**  
**C1** 220...240V AC (50...60Hz) ..... 0,--  
**C2** 110...120V AC (50...60Hz) ..... 0,--  
**C3** 48V AC (50...60Hz) ..... 7,--  
**C4** 24V AC (50...60Hz) ..... 7,--  
**C5** 24V DC ..... 41,--  
**C6** 12V DC ..... 52,--  
**C7** 48V DC ..... 41,--  
**C9** Special voltage ..... on request

**Self-monitoring**  
**D0** Standard = without monitoring  
**D1** Function monitoring ..... 69,--  
**D2** Voltage monitoring ..... 30,--

**Signal lamps<sup>1)</sup>**  
**H0** Standard = with function LEDs ... 0,--  
**H1** Collar for function LEDs ..... 9,--  
**H2** Signal lamp, LED green ..... 27,--  
**H8** Large signal lamp, LED green .... 98,--

**Bulk goods temperature/T<sub>(process)</sub>**  
**E0** Standard = -25°C...+80°C<sup>2)</sup>.. 0,--  
**E1** -40°C...+150°C ..... 88,--  
**E2** -25°C...+200°C ..... 144,--  
**E3** -25°C...+260°C ..... 155,--  
**E7** Appliance heating 2.5 Watt ..... 62,--

**Container pressure / p<sub>(process)</sub>**  
**P0** Standard = -0.5...5 bar<sup>3)</sup> 0,--

**Process connection** ..... € €  
**G3** Thread G1½ DIN/ISO 228 ..... 4,-- 24,--  
**G9** Other threads ..... on request  
**F9** Flanges ..... on request

**Material, process connection**  
**PV** PVC, grey  
**E** Stainless steel 1.4301 / 304  
**X** Other materials ..... on request

**Measuring blade**  
**M0** without measuring blade ..... -5,--  
**TM** Blade TK44 ..... 0,--  
**M9** Other measuring blades ... on request

Measuring blade passes through tight hole of:  
**G3**

**Supplies with surcharges** € €

**DF-SH** Weather protection hood in PVC, RAL 7001 ... 10,--  
**DF-SM3** Hexagonal nut G1½ ..... 5,-- 10,--  
**Material of nuts**  
**A** Aluminium  
**E** Stainless steel 1.4301 / 304  
**DF-KV1** Second cable union for standard version .... 4,--

**Delivery from Stock**  
**ordered until 12°° - dispatched at 16°°**

**Quantity discounts**  
5 - 9 3%  
10 - 24 5%  
25 - 50 10%



**B0, D0, H0, E0, P0 and M0 are not needed** for order code

**Housing selection**

A1 Standard compact aluminium housing ..... 0,--  
A2 Stainless steel compact housing ..... 150,--

A1  
A2

DF33 ..... Order code

**with angular rotating measuring blade absolutely tight, because without seal ring**  
**suitable for: wet, aggressive bulk goods, sludges, liquids for interfacial level detection**

3

**Full, empty and demand indicator**


for any mounting position  
with circulating measuring blade, absolutely tight !

**Signal contact** 2 A / 250V AC potential-free

**Type of protection** IP66 in accordance with DIN EN 60529

**Maintenance** none

3

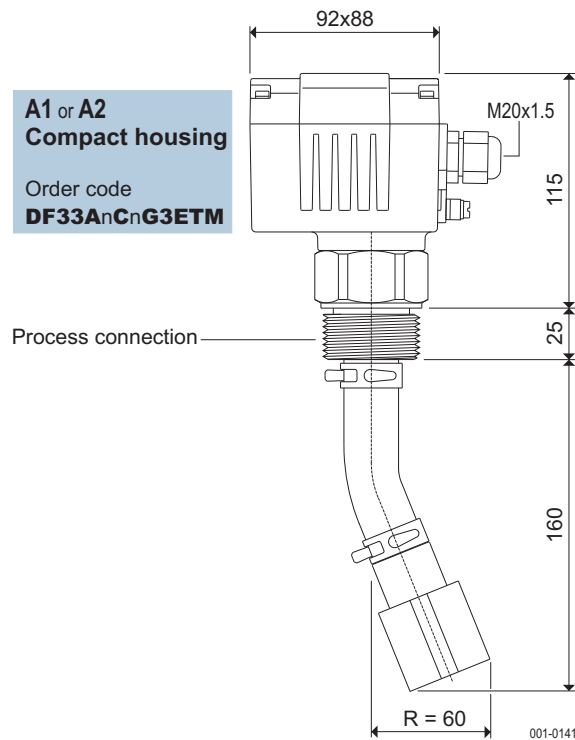

You will find further technical details  
under appliance information **DF-GI-..**