

## Level measurement

Guided wave radar

**MOLOS**  
wave

**1**

Yo-Yo sensing systems

**MOLOS**  
bob

**2**

Visualization

**MOLOS**  
visu

**3**

Rotation

**MOLOS**  
roto

**4**

Membrane

**MOLOS**  
membran

**5**

## Level indicator

Vibration

**MOLOS**  
vibro

**6**

Microwave barrier

**MOLOS**  
barrier

**7**

Pendulum

**MOLOS**  
pendu

**8**

Coding

**MOLOS**  
code

**9**

## Hose couplings

Limit switch

**MOLOS**  
switch

**10**

Swivelling lever

**MOLOS**  
swing

**11**

Lockable couplings

**MOLOS**  
lock

**12**

Overload protection

**MOLOS**  
safe

**13**

Silo filling device

**MOLOS**  
safe

**14**

## Bulk solids handling

Pressure device

**MOLOS**  
pressdec

**15**

Microwave flow sensor

**MOLOS**  
flow

**16**

Pinch valves

**MOLOS**  
valve


**17**



**Advantages of visualization systems:**

- Clearly arranged indication of actual filling levels
- Easy evaluation of the 4-20 mA output signal without process control
- Availability of filling levels on any computer with internet connection
- Simple installation and parameterisation
- VA-EI ... delivered finally parameterised

**Visualization of continuously measured filling levels.**

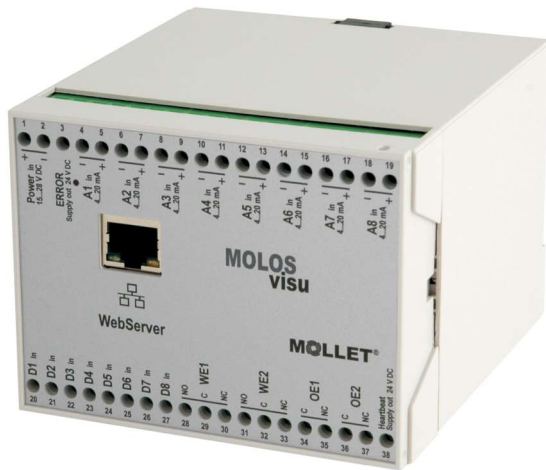

VB20EA.CDR

**VB20EA**

Webserver for indication of 1-8 actual filling levels on any network-compatible computer and with digital in- and outputs



ENDA EI141.JPG

**VA-EI141**  
Digital level indication



ENDA EI7412.JPG

**VA-EI7412**  
Digital level indication with relay outputs

## Selection list

# VB20

### Web-Server

Indication of 1-8 actual filling levels on any network-compatible computer

## Basic device

### Choice of options

#### In- and output

**Standard** = 8 analog inputs, error signal .....  
**EA** 8 digital inputs, 4 switch- and 1 diagnose output ....

VB20

← Order code

# VA-EI7412

### ENDA

Universal, digital LED filling level indication with two relay outputs

## Basic device

### Choice of options

#### Supply voltage

**C1** 230 V ~ (AC 50...60Hz) .....  
**C5** 24 V == (DC) .....

VA EI7412

← Order code

# VA-EI141

### ENDA

Universal, digital LED filling level indication

## Basic device

### Choice of options

#### Supply voltage

**C1** 230 V ~ (AC 50...60Hz) .....  
**C5** 24 V == (DC) .....

VA EI141

← Order code

We provide deliveries, services and offers exclusively on the basis of our General Terms and Conditions that are available for viewing and download at [www.mollet-level.com](http://www.mollet-level.com).

Technical alteration rights reserved.

